


NOTES:

1. CORNER POSTS TO BE 300MM Ø TIMBER, CONCRETE OR GAL STEEL STRAINER POSTS OR 100MM Ø GALVANISED STEEL
2. STAYS TO BE TIMBER, CONCRETE OR GAL STEEL POST. FENCE TO BE CONSTRUCTED TO COUNCIL'S MINIMUM STANDARD.
3. I.E. 2 BARBS, 3 PLAIN WIRES, 0.75M HIGH NETTING OR RINGLOC.
4. MINIMUM OF 15 METRE LENGTH REQUIRED FROM EDGE OF FORMATION TO THE GATE TO STORE A SINGLE TRUCK.
5. IF ANY VEHICLE OVER 15 METRE LONG ARE ANTICIPATED THEN 25 METRE INDENTATION IS REQUIRED.
6. ON SEALED ROAD, ACCESS TO BE SEALED FROM EDGE OF EXISTING BITUMEN TO GATE AS INDICATED. BITUMEN SEAL TO BE 14/7MM DOUBLE
7. CULVERT TO BE CONCRETE PIPE, SIZED FOR 20 YEARS ARI.
8. INSTALL GUIDE POST AT EACH END OF THE HEADWALL.
9. MINIMUM PIPE GRADE 1%.
10. IF SHOULDER WIDENING REQUIRED ON OTHER SIDE OF THE ROAD FOR SCHOOL BUS, THE WIDENING TO BE 30M LONG x 3.0M WIDE
11. GATE TO OPEN INWARDS

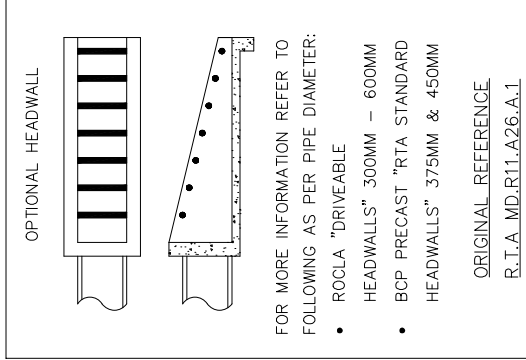

SECTION A - A

		A1 SCALE AS SHOWN	NUMBER OF SHEETS 34	SHEET NUMBER 13
www.dial1100.com.au BEFORE YOU DIG		FILE NAME GMC-VER-1	STANDARD DRAWINGS DIVG	
RURAL ACCESS OFF A PUBLIC ROAD		APPROVED IAN G. GALLOWAY GOVERNMENT MULTI-PURPOSE OPERATIONS DATE: 28/02/2018		
GCMC CENTRE, 16A KILBOURNE STREET GOLDBURN, NSW 2590 LOCKED BAG 22, GOLDBURN, NSW 2590 PHONE: (02) 4823 4444 FAX: (02) 4625 1466		AMENDMENTS NOTES & DETAILS CHANGED/ADDED (ALDRIDGE 2017) DETAILS CHANGED - ADDITION OF GAL STEEL (D'ELUSON 2018) NOTES & DETAILS CHANGED/ADDED (ALDRIDGE 2018)		
AUSTRALIAN HEIGHT DATUM If the actual work site differs from the original drawing the person performing the work must amend this copy accordingly and return it to the Design Office.		AS 1100 STANDARDS		